


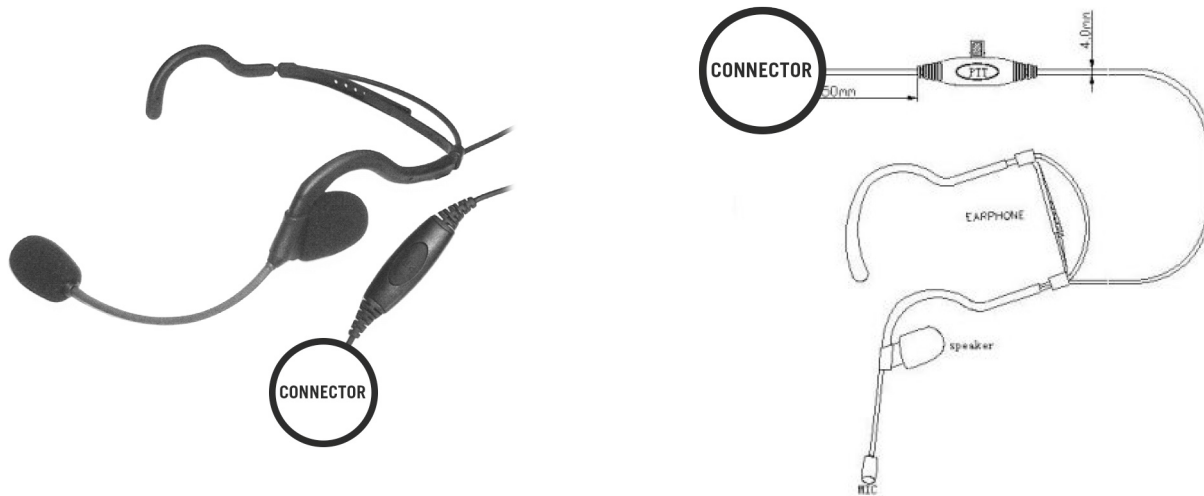

Model: **TX760-** (xxx)

Connector Suffix	Radio Models														
H02 	HYT TC-610P / TC-780														
Speaker Specification:	<table> <tr> <td>Type:</td><td>Transducer Moving coil dynamic speaker</td></tr> <tr> <td>Impedance:</td><td>16 $\Omega \pm 15\%$ @ 1 kHz</td></tr> <tr> <td>Sensitivity:</td><td>110 ± 3 dB @ 1 kHz</td></tr> <tr> <td>Resonance freq:</td><td>(F0) 400 Hz $\pm 20\%$</td></tr> <tr> <td>Frequency respond:</td><td>F0 ~ 9 kHz</td></tr> <tr> <td>Rated input power:</td><td>500 mW</td></tr> <tr> <td>Maximum input:</td><td>800 mW</td></tr> </table>	Type:	Transducer Moving coil dynamic speaker	Impedance:	16 $\Omega \pm 15\%$ @ 1 kHz	Sensitivity:	110 ± 3 dB @ 1 kHz	Resonance freq:	(F0) 400 Hz $\pm 20\%$	Frequency respond:	F0 ~ 9 kHz	Rated input power:	500 mW	Maximum input:	800 mW
Type:	Transducer Moving coil dynamic speaker														
Impedance:	16 $\Omega \pm 15\%$ @ 1 kHz														
Sensitivity:	110 ± 3 dB @ 1 kHz														
Resonance freq:	(F0) 400 Hz $\pm 20\%$														
Frequency respond:	F0 ~ 9 kHz														
Rated input power:	500 mW														
Maximum input:	800 mW														
Microphone Specification:	<table> <tr> <td>Sensitivity range:</td><td>-34 ± 2 dB RL = 2.2 kΩ Vs = 3.0 V(DC) 1 kHz 0 dB = 1 V/Pa</td></tr> <tr> <td>Impedance max:</td><td>2.2 kΩ 1 kHz (RL = 2.2 kΩ)</td></tr> <tr> <td>Frequency:</td><td>100 - 12 kHz</td></tr> <tr> <td>Current consumption max:</td><td>0.5 uA RL = 2.2 kΩ Vs = 3.0 V(DC)</td></tr> <tr> <td>Operation voltage range:</td><td>1.0 V - 10 V(DC)</td></tr> <tr> <td>Max sound pressure level:</td><td>115 dB S.P.L</td></tr> </table>	Sensitivity range:	-34 ± 2 dB RL = 2.2 k Ω Vs = 3.0 V(DC) 1 kHz 0 dB = 1 V/Pa	Impedance max:	2.2 k Ω 1 kHz (RL = 2.2 k Ω)	Frequency:	100 - 12 kHz	Current consumption max:	0.5 uA RL = 2.2 k Ω Vs = 3.0 V(DC)	Operation voltage range:	1.0 V - 10 V(DC)	Max sound pressure level:	115 dB S.P.L		
Sensitivity range:	-34 ± 2 dB RL = 2.2 k Ω Vs = 3.0 V(DC) 1 kHz 0 dB = 1 V/Pa														
Impedance max:	2.2 k Ω 1 kHz (RL = 2.2 k Ω)														
Frequency:	100 - 12 kHz														
Current consumption max:	0.5 uA RL = 2.2 k Ω Vs = 3.0 V(DC)														
Operation voltage range:	1.0 V - 10 V(DC)														
Max sound pressure level:	115 dB S.P.L														